

INFRARED DRYING OF FULL LEMON FRUITS

Matouk, A.M.¹; M.M.El-Kholy²; A.Tharwat¹ and W.M. Abdelrahman¹.

⁽¹⁾ Agric. Eng., Dept. Fac. of Agric. Mansoura Univ., Egypt.

⁽²⁾ Food Process Engineering and Deputy Director of Agric. Eng. Res. Institute.

ABSTRACT

A study was carried out to test and evaluate the use of infra-red radiation as heat energy source for drying full lemon fruits. A laboratory scale dryer was developed and tested at the laboratory of Agric. Eng. Dept. Fac. of Agric. Mansoura Univ. The experimental treatments included three different levels of radiation intensity (0.973-1.093-1.161 kW/m²), three different air temperatures (40, 50 and 60°C) and constant air velocity of 1 m/sec. The drying behavior was simulated using two different thin layer models (Lewis's and Henderson, and Pabis's). The studied models were compared with the obtained drying data, and the most suitable model for predicting the change in lemon moisture during drying process content was then assessed. Final quality of the dried lemons was also determined. The results show that, both studied models could describe the drying behavior of lemons satisfactorily. However, the Lewis's model considered more proper in terms of precision and application simplicity for describing the drying behavior and predicting the changes in moisture content. The quality tests of the dried lemons showed that, radiation intensity of 1.093 kW/m² with air temperature of 50°C recorded the best dried lemon quality in terms of higher retention of ascorbic acid (Vitamin C), citric acid and total soluble sugars.

INTRODUCTION

Citrus, *Citrus.*, is considered as one of the most important crops in all countries of the world. In Egypt, citrus rank third after cotton and rice. It is primarily valued for the fruit, which is either eaten alone (sweet orange, tangerine, grapefruit, etc.) as fresh fruit, processed into juice, or added to dishes and beverages (lemon, lime, etc.). (Manner, 2006)

Citrus is a major export product of Egypt. The total cultivated area for citrus fruit is about 529290.5 feddan and total production is estimated at 2,149,349 ton/year. The average volume of citrus exported to various countries during 1997–2000 ranged from 205,800 to 210,500 tons. (Biosecurity, 2002)

Dehydration of foods is aimed at producing a high density product, when adequately packaged has a long shelf time, after which the food can be rapidly and simply reconstituted without substantial loss of flavor, color, taste and aroma. (Sharma *et al.*, 2005)

New and innovative techniques that increase the drying rate and enhance product quality have achieved considerable attention in the recent past. Drying by infrared radiation is one among them, gaining popularity because of its inherent advantages over conventional heating (Mongpraneet *et al.*, 2002).

Experimental studies on infrared drying of various food products including vegetables and fruits have been reported by (Ginzburg 1969).

Application of infrared radiation to food processing has gained momentum due to its inherent advantages over hot-air heating. Infrared processing has been tried in baking, roasting, thermal treatments (blanching, pasteurization, sterilization, etc.) and drying of foodstuffs (Sandu, 1986).

In general, FIR radiation is advantageous for food processing because most food components absorb radiative energy in the FIR region. (Sandu, 1986)

Hot-air drying is the most commonly employed commercial technique for drying of biological products.(Mazza and Lemaguer, 1980). Dehydrated whole lime is a unique product, consumed mainly in the Middle East. However, there is no readily available information about the drying of lime fruit using infrared heating, and its effect on the changes that occur in its flavor profile as a result of processing, though the fruit is valued mainly for its flavor.

The general objective of the present work was to study and evaluate the use of infrared radiation as a heat energy source for drying lemon fruits as a new approach for decreasing the drying time and enhancing the product quality.

MATERIALS AND METHODS

Materials:

Tested crop:

Freshly-harvested lemon fruits (*Citrus aurantifolia*) was used for conducting the experimental work. The initial moisture content of the freshly harvested lemon ranged from 88% to 92% (dry basis) and the drying runs were stopped when the final moisture content reached about ~5 % (d.b.).

Structure of the laboratory scale infrared dryer:

Fig. (1) illustrates a schematic view of the laboratory scale dryer used during the experimental work.

As shown in Fig. (1) the drying bed consists of three drying chambers. Each chamber constructed of an iron frame of 40 × 70 × 50 mm (L × W × H). The base of each chamber is made of stainless steel wire net and used for accommodating a drying tray. The three drying trays are supported inside the dryer body in vertical consequence with distances of 15 mm between the trays and the heat sources. For heating and temperature controlling of the dryer, two (1 kW) ceramic Infrared heaters were fixed over two iron blades and assembled into the sealing of each drying chamber facing the drying tray. For controlling the distance between the ceramic heaters and the drying trays, screw rods are used to allow movement of the heaters up and down. To control the radiation intensity of the infrared heaters, a set of dimmers are used.

For air heating, electric heaters are used for each drying chamber. The air heating circuit of each drying chamber consists of 2 kW electric heaters

fixed over the surface of an iron net in order to increase the area of air contact with the heating source.

The air temperature control of each drying chamber (based on ON and OFF system) was consisted of a precise digital thermostat for stopping and connecting the heaters and keeping the pre-adjusted temperature constant throughout each experimental run.

For air supply three identical axial flow fans model OLMO are used for suction of heated air in a parallel direction over the surface of each drying

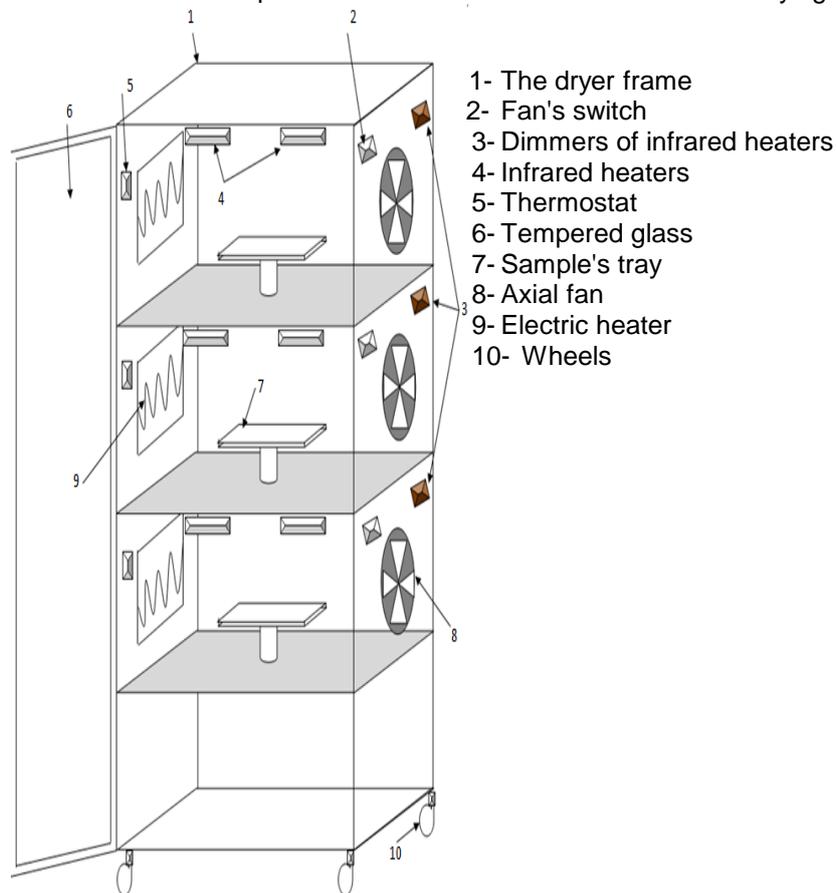


Fig.(1):Schematic view of experimental infrared drying Setup

tray. Each fan is assembled in one side of each drying chamber facing the heater. The drying air is supplied equally to each drying chamber using a speed control electric switch.

Experimental Treatments:

The experimental treatments are included the following:

- 1- Three levels of infrared radiation intensity (0.973, 1.093, and 1.161 kW/m²).
- 2- Three levels of inlet air temperature (40, 50 and 60° C) and constant air velocity at 1 m/sec are used as recommended by (*Sharma et al., 2005; Arafa, 2007*).

Test procedure and measurements:

After it is clear that, the radiation intensity, air temperature and air velocity have been stabilized, the lemon samples are distributed uniformly as a single layer on the tray which is then placed directly inside the drying bed. At the same time three sub samples each of 10-20 g are taken to determine the initial moisture content using the drying oven method as recommended by (*AOAC, 1995*).

The observation on mass loss changes for lemon samples are recorded every 15 min during the first 2 hr and every 30 min until the end of each drying run (until the moisture content of the lemon reached ~5% d.b.).

In order to minimize the experimental errors of each run, it is replicated three times, and the average is considered.

Measurements and Instrumentation

1- Moisture content determination:

Initial and final moisture contents of lemon fruits are determined by the method described in A.O.A.C. (1995) with an electric oven adjusted at 70°C for 16 hours.

2- Radiation intensity measurement:

A radiation sensor with data recorder (model H-201) is used for the measurement of radiation intensity.

3- Air velocity measurement:

A TRI – SENSE temperature / humidity / air velocity meter is used for measuring the air velocity with an accuracy of 0.01 m/s. The unit is a self – contained direct reading portable instrument.

4- Quality evaluation tests:

The quality evaluation tests of the dried lemons included; determination of ascorbic acid, citric acid, and total soluble sugars, are performed.

5- Temperature measurement:

A temperature meter model (Trotec 2000S) connected with an Iron – Constantine thermocouple type (T) is used to measure air and sample temperatures.

The examined drying models for simulating the drying data:

The obtained data of the laboratory experiments are employed to examine the applicability of the two studied thin layer drying models (Lewis's and Henderson, and Pabis's equations) on describing and simulating the drying data.

The examined drying models included:

1-Lewis's model:

$$MR = \exp (-k_L t) \quad (1)$$

$$MR = \frac{M - M_f}{M_o - M_f}$$

Where,

- MR =Moisture ratio, dimensionless
- M =Instantaneous moisture content during drying process,% (d.b)
- M₀=Initial moisture content of lemon samples, % (d.b)
- M_f =Final moisture content of lemon samples, % (d.b)
- k_L =Drying constants, min⁻¹
- t =Drying time, min

Lewis's model has been applied to fit the drying data of the lemons. After converting its form to the logarithmic form relating the moisture ratio (MR) of the sample with the elapsed drying time (t) it can be written as follows:

$$\ln MR = (-k t)$$

The analysis was conducted based on using the final moisture content (M_f) for calculating the moisture ratio (MR).

2-Henderson and Pabis's model:

$$MR = A \cdot \exp(-k_h t) \quad (2)$$

Where,

- A =Drying constant, dimensionless
- k_h=Drying constants, min⁻¹

Henderson and Pabis's model has been applied to fit the drying data of the lemons. After converting its form to the exponentially form and calculating the constants (k and A) from relating the moisture ratio (MR) of the sample with the drying time (t).

RESULTS AND DISCUSSION

1-Influence of drying parameters on the change in lemon moisture ratio:

Fig. (2) illustrates the change in lemon moisture ratio as related to the drying time at different levels of drying air temperature and radiation intensity. It evidently that, the reduction in moisture ratio of lemon varied with the experimental treatments and it was increased with the increase of radiation intensity, and the drying air temperature.

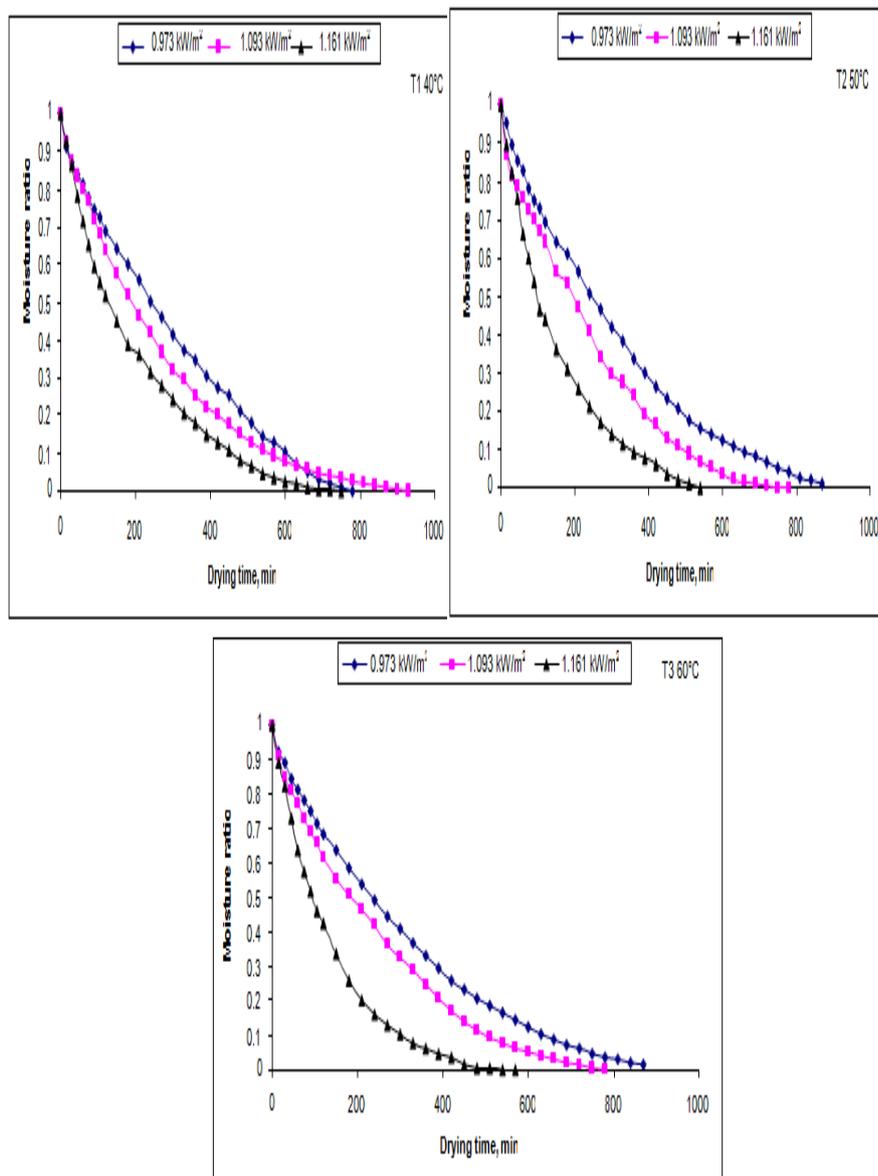


Fig.(2):Lemons moisture ratio as related to drying time at different radiation intensity and different drying air temperatures.

Analysis of thin layer drying using Lewis's equation:

The values of drying constant (k_L) for the Lewis's model (1) could be obtained from the exponential relationship between the moisture ratio (MR) of the tested sample versus drying time (t) for all studied drying parameters as shown in Fig. (3). The computed values of the drying constants are listed in table (1).

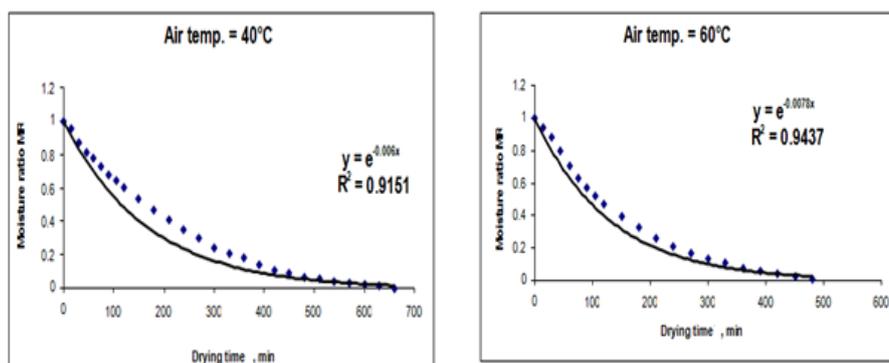


Fig.(3): Determination of the drying constant; (k_L) of Lewis's equation at the maximum radiation intensity of 1.161 kW/m² and minimum and maximum heating air temperatures

Table (1): Drying constant (k_L) for Lewis's equation at different levels of radiation intensity and air temperatures.

Infrared radiation intensity kW/m ²	Drying constant, k_L		
	Air temperature °C		
	40	50	60
0.973	0.0042	0.0044	0.0045
1.093	0.0049	0.0054	0.0057
1.161	0.0063	0.0072	0.0078

As shown in table (1) the drying constant (k_L) increased with the increase of drying air temperature and the increase of the radiation intensity.

A multiple regression analysis was employed to relate the studied parameters (I and T) with the drying constant (k_L) at constant air velocity of 1 m/sec. The analysis showed that, the nature of dependence could be expressed by the following equation:

$$k_L = 0.0137(I) + 0.000043 (T) - 0.0113 \quad \dots(3)$$

$$[R^2 = 0.8836 ; SE = 0.00049]$$

Where,

k_L = Drying constant, 1/min
 T = Air temperature, °C
 I = IR radiation intensity, kW/m²

Analysis of thin layer drying of full lemon fruits using Henderson and Pabis's equation:

The values of drying constant (k_h) and (A) for Henderson and Pabis's model (2) could be obtained from the exponential relationship between (MR) versus drying time (t). The exponent of the drying curve represents the drying constant (k_h) while the intercept represents the constant (A) as shown in fig.(4). The computed values of the drying constants (k_h and A) are listed in table (2).

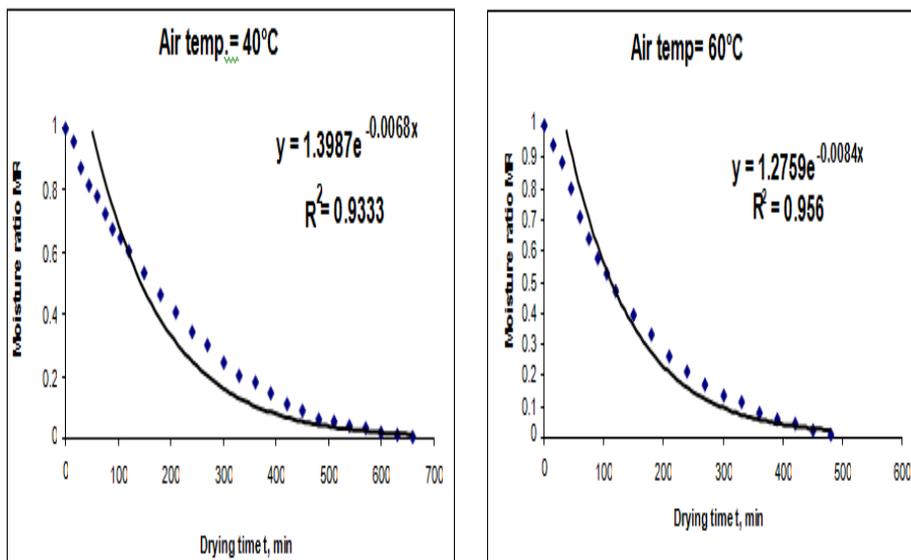


Fig. (4): Determination of the drying constant; (k_h, A) of Henderson and Pabis's equation at the maximum radiation intensity of 1.161 kW/m^2 at minimum and maximum heating air temperature.

As shown in table (2) the drying constant (k_h) increased with the increase of drying air temperature (T) and the increase of radiation intensity (I). The dependence of drying constant (k_h) of equation (2) on the experimental parameters was further studied using the multiple regression analysis. It was found that, the drying constant (k_h) depending on the drying air temperature (T) and radiation intensity (I) as follows:

$$K_h = 0.014565(I) + 0.000054 (T) - 0.01221 \quad \dots(4)$$

$[R^2 = 0.8905 ; SE = 0.00052]$

Where,

- K_h = Drying constant, 1/min
- T = Air temperature, °C
- I = Radiation intensity, kW/m^2

Table (2):Drying constant (k_h) at different levels of drying air temperature and radiation intensity.

Infrared radiation intensity kW/m^2	Drying constant, k_h		
	Air temperature °C		
	40	50	60
0.973	0.0046	0.0049	0.0050
1.093	0.0053	0.0060	0.0065
1.161	0.0069	0.0078	0.0086

Meanwhile, the drying constant (A) was calculated for different combinations of drying air temperatures and radiation intensity and listed in table (3).

Table (3): The calculated drying constant (A) of equation (2).

Radiation intensity kW/m ²	Drying constant, A		
	Air temperature °C		
	40	50	60
0.973	1.2367	1.3168	1.3454
1.093	1.2597	1.3439	1.3697
1.161	1.2939	1.3894	1.4133

It clearly reveals that, the values of constant (A) increased with the increasing of drying air temperature and the increase of the radiation intensity. The dependence of drying constant (A) of equation (2) on the experimental parameters was tested using the simple and multiple regression analysis. It was found that, the drying constant (A) is depending upon the drying air temperature and infrared radiation intensity.

The nature of dependence could be expressed by the following equation:

$$A = 0.334 (I) + 0.0056 (T) + 0.689 \quad \dots(5)$$

$$[R^2 = 0.9101 ; SE = 0.02033]$$

Where,

A= Drying constant, 1/min
 T= Air temperature, °C
 I= IR radiation intensity, kW/m²

Fitting curves examining the applicability of Lewis's and Henderson and Pabis's models in simulating the laboratory drying data:

Lewis's model:

The results of simulation analysis indicated that, equation (2) described the drying behavior of full lemon fruits satisfactorily as indicated by the high values of coefficient of determination and low values of standard error (SE). Figs (5 and 6) show the measured and predicted values of moisture content at the minimum and the maximum levels of drying air temperature and radiation intensity.

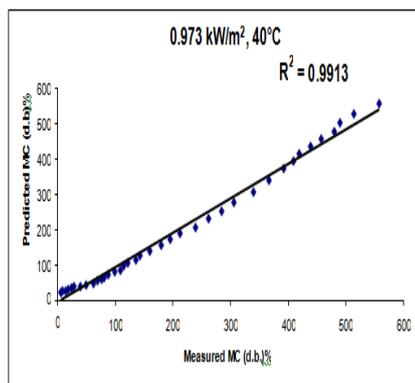


Fig.(5): Measured and predicted values of full lemon moisture content using Lewis's model at (T) 40°C and (I) 0.973 kW/m².

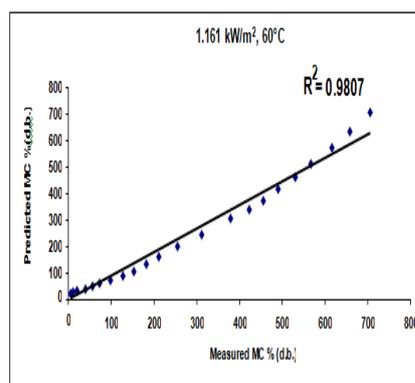


Fig.(6): Measured and predicted values of full lemon moisture content using Lewis's model at (T) 60°C and (I) 1.161 kW/m².

Henderson and Pabis's model:

The results of simulation analysis indicated that, Henderson and Pabis's model also described the drying behavior and predicted the change in moisture content of full lemons fruits satisfactorily as indicated by the high values of coefficient of determination and low values of standard error. Figs. (7 and 8) reveal the measured and the predicted values of moisture content at the minimum and the maximum levels of drying air temperature and radiation intensity.

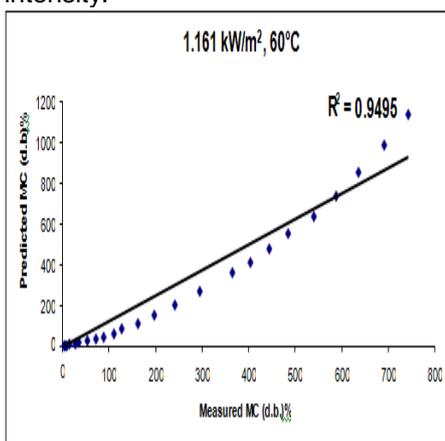


Fig.(7): Measured and predicted values of full lemon fruits moisture content using Henderson and Pabis's model at (T) 60°C and (I) 1.161 kW/m².

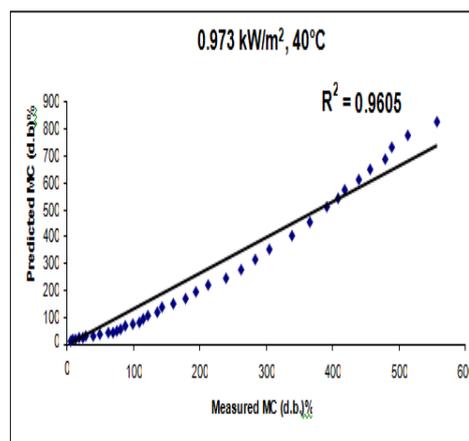


Fig.(8): Measured and predicted values of full lemon fruits moisture content using Henderson and Pabis's model at (T) 40°C and (I) 0.973 kW/m².

Comparative evaluation of the studied drying models:

A comparison study for the two drying models (Lewis's and Henderson and Pabis's models) was conducted to assess the most proper drying model for simulating and describing the drying behavior of full lemons under the studied range of experimental parameters. In general, the overall average of the obtained coefficient of determination (R^2) and the standard error (SE) for the observed and predicted moisture content revealed that, both studied models could describe the drying behavior of full lemon satisfactory as indicated from the highly coefficients of determination for the two models which ranged from (0.9725 to 0.9842). On the other hand, Lewis's model could be considered more proper model in terms of precision and application simplicity for describing the drying behavior of full lemon fruits and predicted the change in moisture content during the laboratory drying process.

3-Lemon Samples Quality:

Total soluble sugar:

Fig. (9) illustrates the changes in total soluble sugar as related to radiation intensity and air temperature. As shown in the figures the total soluble sugar was ranged from 0.71 to 1.1%. However, the taste of the dried lemon is the limiting factor for quality acceptance of the dried lemons and varied for different consumers.

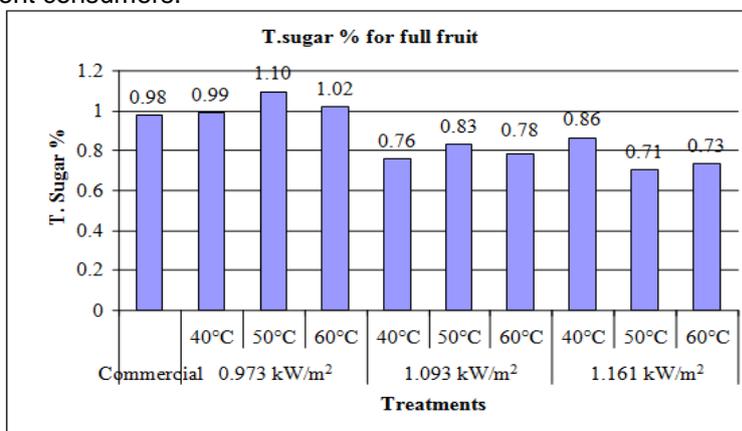


Fig. (9):Changes in the total soluble sugar for full fruit of lemon at different levels of infrared radiation intensity and drying air temperature.

Citric acid:

Fig. (10) presents the percentage of citric acid. The dried full lemon showed higher citric acid percentage for all treatments as compared with the control sample dried under direct sun rays. The recorded percentages of citric acid ranged from 1.32 to 1.67% in comparison with 1.24% for the control sample. The figure also shows that, the radiation intensity of 1.093 kW/m² and air temperature of 50°C provided the highest percentage of citric acid (1.67%).

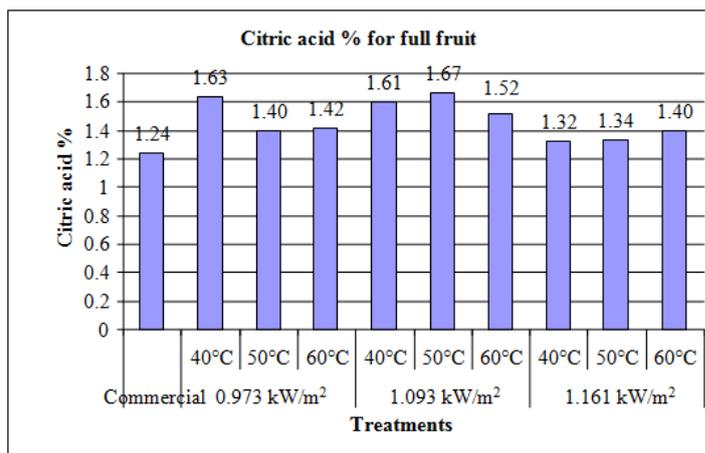


Fig. (10): Changes in citric acid for full fruit of lemon at different levels of infrared radiation intensity and drying air temperature.

Ascorbic acid (vitamin C):

Fig. (11) presents the changes in ascorbic acid as related to different levels of radiation intensity and air temperature. The figure shows that, the commercial nature dried lemon under direct sun rays revealed lower level of ascorbic acid (48.9 mg/100 g dry matter) compared with the ascorbic acid of the dried full lemons. As shown in the figure the ascorbic acid in the full lemon treatment ranged from (62.2 to 74.4 mg/100 g dry matter). Meanwhile, it can be said that, for the full lemon samples, radiation intensity of 1.093 kW/m² and air temperature of 50°C performed the highest retention for the ascorbic acid (74.4 mg/100 g dry matter).

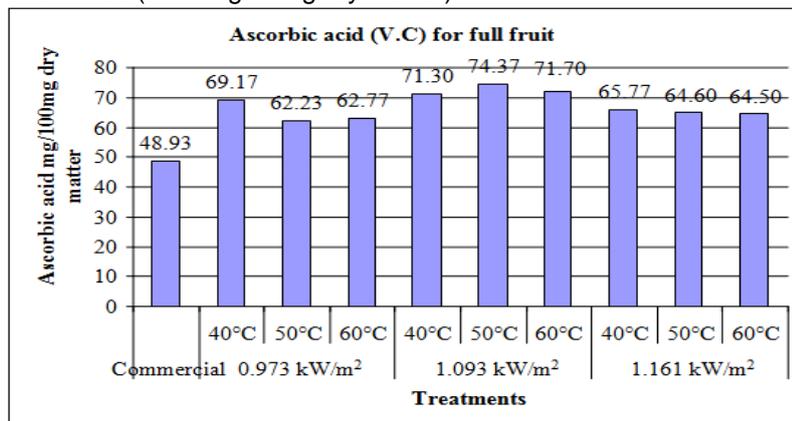


Fig.(11):Changes in ascorbic acid for full fruit of lemon at different levels of infrared radiation intensity and drying air temperature.

In general, the radiation intensity of 1.093 kW/m² with air temperature of 50°C revealed the best results for dried lemon quality.

Conclusions

- 1-The reduction in moisture ratio of full lemon fruits varied with the experimental treatments and it was increased with the increase of radiation intensity, and drying air temperature.
- 2-The drying constant (k_L) of Lewis's model increased with the increase of drying air temperature and radiation intensity.
- 3-The drying constants of Henderson and Pabis's model (k_h , A) increased with the increase of drying air temperature and the radiation intensity.
- 4-Both studied model could describe the drying behavior of full lemon fruits. However, the Lewis's model considered more proper for describing the drying behavior and predicting the changes in moisture content in terms of precision and application simplicity.
- 5-The percentages of total soluble sugar ranged from 0.71 to 1.1%, and the dried full lemons provided higher citric acid and ascorbic acid percentages compared with the control sample dried under direct sun rays.

REFERENCES

- Arafa, G.K. (2007). Optimum drying conditions for thin layer drying sweet basil. *Misr J, Agric. Eng.*, 24(3): 540-556.
- A.O.A.C. (1995). Official method of analysis, association of official analytical chemists. Washington, D.C. USA.
- Biosecurity, A. (2002). Citrus imports from the Arab Republic of Egypt: a review under existing import conditions for citrus from Israel. Department of agricultural, fisheries and forestry- Australia. www.daff.gov.au/
- Ginzburg, A. S. (1969). Application of infrared radiation in food processing. Chemical process engineering series. London: Leonard Hill.
- Manner, H. I., R. S. Buker, V. E. Smith, D. Ward, and Craig R. Elevitch (2006). Citrus (citrus) and Fortunella (kumquat). Species Profiles for Pacific Island Agroforestry. Ver. 2.1. www.traditionaltree.org
- Mazza, G. and M. Lemaguer (1980). Dehydration of onion: Some theoretical and practical considerations. *Journal of Food Technology*, 15, 181–194.
- Mongpraneet, S.; T. Abe and T. Tsurusaki (2002). Accelerated drying of welsh onion by far infrared radiation under vacuum conditions. *Journal of Food Engineering*, 55, 147–156.
- Sandu, C. (1986). Infrared radiative drying in food engineering: a process analysis. *Biotechnology Progress*, 2, 109–119.
- Sharma, G. P.; R. C. Verma and P. B. Pathare (2005). Mathematical modeling of infrared radiation thin layer drying of onion slices. *Journal of Food Engineering* 71 ,282-286.

تجفيف ثمار الليمون الكامل باستخدام الأشعة تحت الحمراء
أحمد محمود معتوق¹، محمد مصطفى الخولى²، أحمد ثروت محمد¹ و
وصال محمد عبدالرحمن¹
¹ قسم الهندسة الزراعية - كلية الزراعة - جامعة المنصورة .
² قسم هندسة تصنيع و تداول المنتجات الزراعية - معهد بحوث الهندسة الزراعية .

أجريت دراسة لإختبار وتقييم استخدام الأشعة تحت الحمراء كمصدر للطاقة الحرارية لتجفيف ثمار الليمون الكاملة باستخدام مجفف معلمي يعمل بالأشعة تحت الحمراء، تم تصنيعه واختباره بمعمل هندسة التصنيع بقسم الهندسة الزراعية- كلية الزراعة – جامعة المنصورة، وشملت المتغيرات التجريبية ثلاثة مستويات لشدة الإشعاع (0.973- 1.093 – 1.161 كيلو واتام² وثلاث مستويات لدرجة حرارة الهواء المستخدم في حمل الرطوبة من الثمار (40-50-60) درجة مئوية، مع تثبيت سرعة الهواء المستخدم عند مستوي 1 م/ث. وقد أجريت التحليلات الرياضية للنتائج المتحصل عليها باستخدام معادلتين لوصف سلوك التجفيف للليمون المجفف في طبقة رقيقة وهما معادلتني (Lewis's and Henderson & Pabis's). أظهرت النتائج المتحصل عليها وصف كلا المعادلتين لسلوك التجفيف لثمار الليمون الكامل بصورة مرضية إلا أن معادلة (Lewis's) قد أعطت نتائج أكثر دقة للتنبؤ بالتغير في المحتوى الرطوبي للليمون كما أن تطبيق تلك المعادلة كان أكثر سهولة مقارنة بمعادلة (Henderson & Pabis's). من ناحية أخرى أظهرت نتائج اختبارات الجودة للليمون المجفف أن شدة الإشعاع 1.093 كيلوواتام² عند درجة حرارة الهواء 50 درجة مئوية قد أعطت أفضل النتائج من حيث الحفاظ علي أعلى نسبة لفيتامين (C)، حمض السيتريك وكذلك السكريات الكلية الذائبة.

قام بتحكيم البحث

كلية الزراعة – جامعة المنصورة
كلية الزراعة – جامعة بنها

أ.د / صلاح مصطفى عبد اللطيف
أ.د / عادل حامد بهنساوى